


V2 FIRE MANAGEMENT SYSTEM

FOR SURFACE ROCKET LAUNCHERS

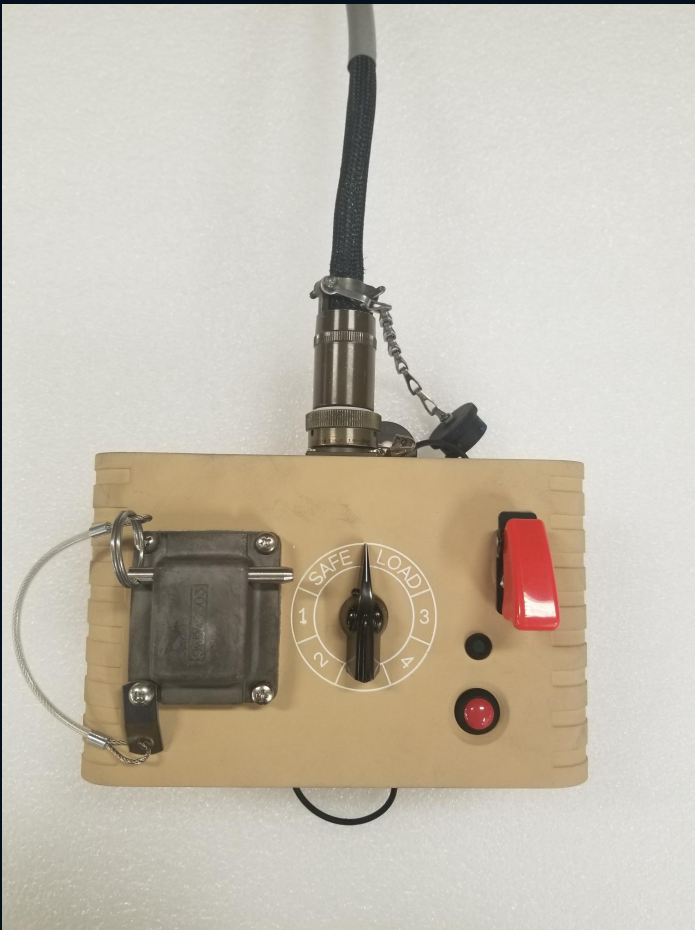

The Version 2 (V2) Fire Management System allows for the control of a single LAND-LGR4 "Fletcher" Launcher from up to 100 feet away with the ability to select and fire any of the four available launcher tubes. With a single safety switch and firing trigger configuration, launcher control is exceedingly intuitive. The system is powered by commercial off-the-shelf 9-volt batteries, enclosed within the firing control unit. The firing control enclosure and cable is EMI/RFI resistant and designed for the harshest environments.

Length _ _ _ _ _ 8.00 in / 20.3 cm
Width _ _ _ _ _ 5.00 in / 12.7 cm
Height _ _ _ _ _ 3.50 in / 8.9 cm
Weight _ _ _ _ _ 9.5 lbs / 4.31 kg



COMPONENTS

- Firing Control Box
- Remote Cable (Standard 20 or 100 foot)
- Batteries (Not Included)

Remote cable lengths can be adjusted to meet users integration requirements. Prices will vary according to length.

P/N: 2020001

FEATURES

- Intuitive Controls
- Rugged Stainless-Steel Firing Control Enclosure
- MIL-DTL-26482 II Connectors
- Environmental EMI/RFI Backshells and Cabling
- Tethered Environmental Dust Caps
- Explosion-Proof Enclosure
- Powered by COTS 9-volt Batteries
- Single Safety Switch for Simplified Operation
- BIT (Built In Test) Ensures Mission Readiness
- Tethered Battery Compartment Lid